



Figure A



Figure B

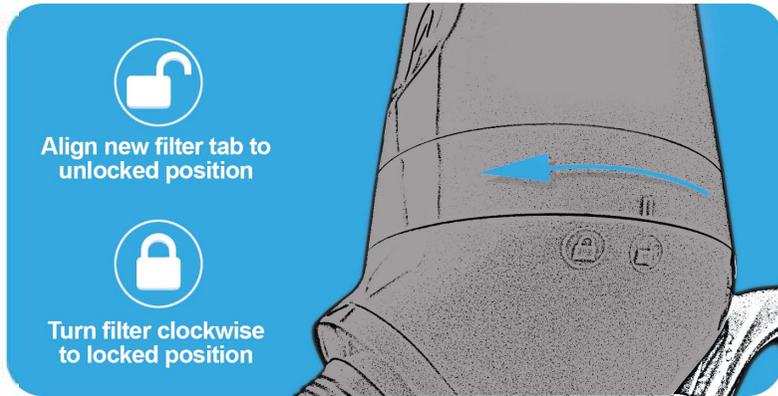


Figure C

- 1 Remove existing shower head. (Figure A)
- 2 Hold the lower filter housing, squeeze chrome filter jacket and remove the filter by turning the shower filter to the unlock position, then lift up. With your hand under the filter, release your squeeze on the chrome filter jacket to allow the filter to slide out. This cartridge may be disposed of with your trash, as it poses no environmental hazards. (Figure B)
- 3 Remove the new filter from the packaging and remove the label from the top end of the cartridge.
- 4 Next slide the new filter into the chrome filter jacket.
- 5 Squeezing the chrome filter jacket, install the new cartridge by lining up the tab located on the side of the filter jacket to the unlock position then turn to the left to lock the filter in place. To ensure the filter is securely locked the tab will line up directly above the lock icon. (Figure C)
- 6 Before re-attaching the shower head, flush and activate the filter until water runs clear. Use cold water for the initial flushing, see "NOTE" below for flushing precaution. After the water has turned clear, adjust the temperature up to a normal shower temperature.

NOTE: THE INITIAL FEW GALLONS OF WATER WILL CONTAIN CARBON FINES AND MAY SOIL YOUR SHOWER STALL.

It's a good idea to place a container underneath the shower filter to catch the first few gallons of water. This carbonized water is great for plants and environmentally friendly. It can be safely discarded in a plant bed or down the drain.



Premium Shower Filter

PSF-1R Replacement Filter Installation Instructions

(PSF-1C) Chrome

NOTE: Notice that there is a slight delay in temperature adjustment due to the volume of water in the filter; take this delay into account when making temperature adjustments. Make slight adjustments and wait 30 seconds for temperature change. Run water until clear and then turn off and back on several times. Repeat this procedure until the initial surge of water is free of discoloration.

The Pelican PSF-1 Shower Filter should be replaced every 6 months to ensure peak performance. If you use the filter more than twice each day, take showers longer than 10 minutes or your city uses surface (lake or river) water, it is recommended that the filter be changed more frequently. Surface water typically has higher levels of sediment and chlorine and will exhaust the filter media more rapidly.

For more information:

www.PelicanWater.com
Toll free: (877) 842-1635

These filters are available through our **Water Shield Auto-Ship program**. No commitments, no hassles and no contracts. Cancel anytime! For more information, please visit pelicanwater.com/watershield.php.



@PelicanWater



Figure A



Figure B

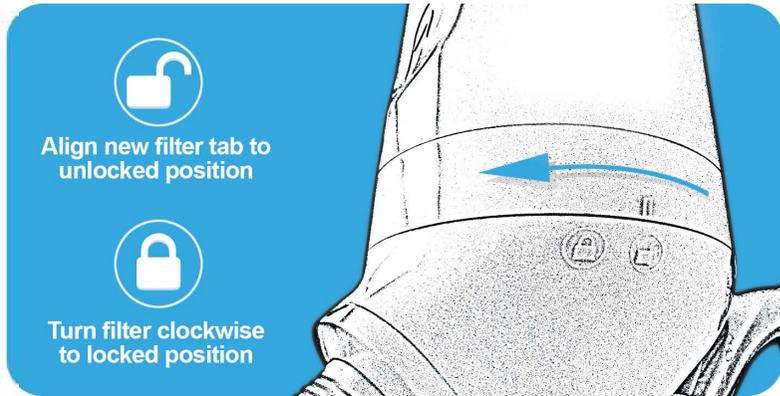


Figure C

- 1 Remove existing shower head. (Figure A)
- 2 Hold the lower filter housing and remove the filter by turning the shower filter to the unlock position and lift up. This cartridge may be disposed of with your trash, as it poses no environmental hazards. (Figure B)
- 3 Remove the new filter from the packaging and remove the label from the top end of the cartridge.
- 4 Next install the new cartridge by lining up the tab located on the side of the filter to the unlock position then turn to the left to lock the filter in place. To ensure the filter is securely locked the tab will line up directly above the lock icon. (Figure C)
- 5 Before re-attaching the shower head, flush and activate the filter until water runs clear. Use cold water for the initial flushing, see “NOTE” below for flushing precaution. After the water has turned clear, adjust the temperature up to a normal shower temperature.

NOTE: THE INITIAL FEW GALLONS OF WATER WILL CONTAIN CARBON FINES AND MAY SOIL YOUR SHOWER STALL.

It's a good idea to place a container underneath the shower filter to catch the first few gallons of water. This carbonized water is great for plants and environmentally friendly. It can be safely discarded in a plant bed or down the drain.



Pelican
Water Systems



Premium Shower Filter

PSF-1R Replacement Filter Installation Instructions

NOTE: Notice that there is a slight delay in temperature adjustment due to the volume of water in the filter; take this delay into account when making temperature adjustments. Make slight adjustments and wait 30 seconds for temperature change. Run water until clear and then turn off and back on several times. Repeat this procedure until the initial surge of water is free of discoloration.

The Pelican PSF-1 Shower Filter should be replaced every 6 months to ensure peak performance. If you use the filter more than twice each day, take showers longer than 10 minutes or your city uses surface (lake or river) water, it is recommended that the filter be changed more frequently. Surface water typically has higher levels of sediment and chlorine and will exhaust the filter media more rapidly.

For more information:

www.PelicanWater.com
Toll free: (877) 842-1635

These filters are available through our **Water Shield Auto-Ship program**. No commitments, no hassles and no contracts. Cancel anytime! For more information, please visit pelicanwater.com/watershield.php.



@PelicanWater